

MULTI-TECHNOLOGY ACCESS READER

125 kHz MULTI-PROX, MIFARE® DESFIRE® EV2 & EV3, NFC



Available in touchscreen and keypad versions



BENEFITS

- Compatible with legacy Prox 125 kHz technologies
- Seamless migration to secure technologies
- Modular concept for maximum cost optimization
- Backward compatible and interoperable



125 kHz
13.56 MHz



NFC



WIEGAND
OSDP™



Water
resistant
EQ IP65



Vandal-proof
IK10



YOUR LOGO

- Print your logo
- Casing color
- Skin effect customization

The Architect® Hybrid Multi-Prox access control reader facilitates your 125 kHz Prox migrations to secure and sustainable technologies.

MULTI-TECHNOLOGY READER

Offering support for the widest range of contactless identification technologies, the reader is the ideal choice for making a gradual transition to high security. It simplifies management of upgrades, technological migrations and complex multi-site configurations.

125 kHz Prox technologies

The reader is compatible with many legacy Prox technologies: EM®, HID Proximity®, AWID®, INDALA®, IOPROX®...

RFID MIFARE® DESFire® EV2 & EV3

It supports the latest MIFARE® DESFire® EV2 & EV3 contactless technologies with new data security features:

- **Secure Messaging EV2:** protection against attacks via interleaving and replay.
- **Proximity Check:** protection against relay attacks.

The reader supports the use of public security algorithms recognized by specialized and independent organizations in information security (ANSSI French cybersecurity agency and FIPS).

A CUSTOMIZED SCALABLE CONFIGURATION

The Architect® reader can be customized to meet your needs: all the features and security levels of the readers in your organization can be upgraded - by RFID card or protocol.

The scalability allows you to remove the 125 kHz module once your technology migration is completed and / or to implement new functionalities: keypad or touchscreen.

OPEN TECHNOLOGIES FOR EASY INTEGRATION

The reader is compatible with many access control systems and accepts multiple interfaces and protocols (Wiegand and OSDP™ v1 & v2).

EASY TO INSTALL

The Architect® Hybrid Multi-Prox reader delivers ease of installation for indoor or outdoor environments:

- Removable terminal block & connector
- Compatible with European and American back boxes
- Mounting on any surface, including metal, concrete, brick, etc.


STANDING THE TEST OF TIME

The design of the reader makes it very robust. It is IP65 rated for ruggedness in harsh environments and IK10 certified for vandal resistance.

SPECIFICATIONS

Operating frequency / Standards	125 kHz 13.56 MHz: ISO14443 types A and B, ISO18092
Chip compatibility	EM42xx / EM4x50, HID Proximity®, INDALA® (Wiegand 26 & 27 bits), IOPROX®, AWID® MIFARE® Ultralight® & Ultralight® C, MIFARE® Classic & Classic EV1, MIFARE Plus® (S/X) & Plus® EV1, MIFARE® DESFire® 256, EV1, EV2 & EV3, PicoPass® (CSN only), iCLASS™ (CSN only*), NFC, HCE
Functions	CSN, pre-configured (Easyline - PC2) and secure read-only / Controlled by protocol (read/write)
Communication interfaces & protocols	Wiegand Output RS485 output with OSDP™ v1 (plain communication) and v2 (SCP secure communication) protocols
Reading distances**	Up to 8 cm / 3.14" with a 125 kHz card Up to 8 cm / 3.14" with a MIFARE® DESFire® EV2 card
Light indicator	2 RGB LEDs - 360 colors ▲ ▲ ▲ Configurable by RFID card, software or controlled by external command (0V) according to interface
Audio indicator	Built-in buzzer Configurable by RFID card, software or controlled by external command (0V) according to interface.
Relay	Automatic or OSDP™-controlled anti-tearing management depending on interface
Power requirement	Maximum 170 mA / 12 VDC
Power supply	7 VDC to 28 VDC
Connections	Plug-in terminal block 10 points (5 mm / 0.31") - Plug-in terminal block 2 points (5 mm / 0.31"): O/C contact - Pull-out status indicator
Materials	ABS-PC UL-V0 (black)
Dimensions (h x w x d)	145.6 x 80 x 25.7 mm / 5.7" x 3.15" x 0.98" (general tolerance following ISO NFT 58-000 standard)
Operating temperatures	- 30 °C to + 70°C / - 22°F to + 158°F
Tamper switch	Accelerometer-based tamper detection system with key deletion option (patented solution) and/or message to the controller
Protection / Resistance	IP65 level - weather, water and dust resistant (CEI NF EN 61086 homologation) Humidity: 0 - 95% / Reinforced IK10 certified vandal-proof structure
Mounting	Compatible with any surfaces and metal walls - Wall mount/Flush mount: - European 60 & 62 mm / 2.36" & 2.44" - American (metal/plastic) - 83.3 mm / 3.27" - Dimensions: 101.6 x 53.8 x 57.15 mm / 3.98" x 2.09" x 2.24" - Examples: Hubbel-Raco 674, Carlon B120A-UP
Certifications	CE (Europe), FCC (USA), IC (Canada), UKCA (United Kingdom) and UL
Part numbers	Easyline pre-configured - Wiegand protocol ARC-RX1-IM/PC2-3x/1 Wiegand protocol ARC-RX1-IM/BF5-3x/1 Controlled by OSDP™ protocol - RS485 ARC-WX3-IM/BF5-7OS/1

DISCOVER OUR CREDENTIALS AND OUR ERGONOMIC MANAGEMENT TOOLS

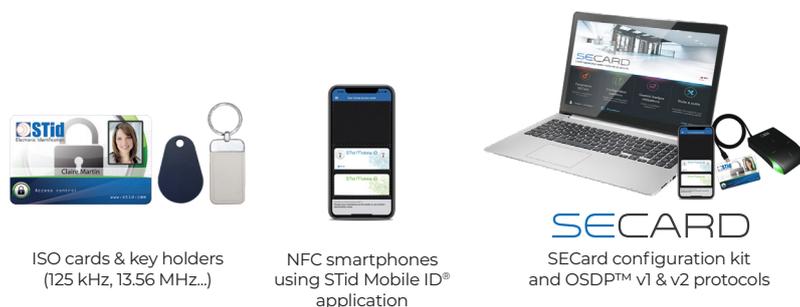

ISO cards & key holders
(125 kHz, 13.56 MHz...)

NFC smartphones
using STid Mobile ID®
application

SECARD
SECard configuration kit
and OSDP™ v1 & v2 protocols



*Our readers only read the / UID PICO1444-3B serial number of the iCLASS™ chip. They do not read the cryptographic protections iCLASS™ nor the / UID PICO 15693 serial number of HID Global.

**Warning: Communication distances are measured at the center of the antenna. Measured at the center of the antenna, they depend on the antenna configuration, the installation environment of the player, the power supply voltage, and the playback mode (secure or not). External disturbances can cause the reading range to decrease.

Legal Notice: STid, STid Mobile ID® and Architect® are registered trademarks of STid SAS. All trademarks mentioned in this document belong to their respective owners. All rights reserved - This document is the sole property of STid. STid reserves the right, at any time and without notice, to make changes to this document and/or to stop marketing its products and services. The photographs are non-contractual.

Headquarters / EMEA

13850 Créasque, France
Tel.: +33 (0)4 42 12 60 60

PARIS-IDF

92290 Châtenay-Malabry, France
Tel.: +33 (0)1 43 50 11 43

STid UK Ltd.

Callows Hill, Warwick CV34 6UW, UK
Tel.: +44 (0) 192 621 7884

NORTH AMERICA

Irving, Texas 75063-2670, USA
Tel.: +1 877 894 9135

LATINO AMERICA

Cuauhtémoc, 06600 CDMX, México
Tel.: +52 (55) 5256 4706

MIDDLE EAST

Dubai Digital Park, DSO, UAE
Tel.: +971 521 863 656